

FLEET SIGNAGE

Released under the Official Information Act 1982



The Fire and Emergency New Zealand Response Fleet uses a distinctive Battenberg pattern for optimum visibility.

The red and yellow 'Battenberg' is internationally recognised as symbolising fire, as well as the coming together of urban (red) and rural (yellow) fire services.

The dynamic composition of the Battenberg reflects Fire and Emergency New Zealand's speed and responsive nature.

The modular nature of the Battenberg strip allows the logo to be integrated seamlessly for greater visibility.

A variation of the logo has been created especially for fleet livery, to ensure the word 'FIRE EMERGENCY' reinforces the forward direction of the vehicle.


Battenberg Response Pattern



RIGHT SIDE - 'FIRE EMERGENCY' should always point to the front of the vehicle



LEFT SIDE - 'FIRE EMERGENCY' should always point to the front of the vehicle



Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

The guiding principals of the Battenberg Response Pattern on the White Response Fleet are:

1. FENZ logo should be positioned on the front door.
2. The Battenberg pattern should extend to the front and rear of the vehicle and should be two lines deep.
3. The Battenberg pattern should stack three lines deep on the door.
4. The blue crest square should be surrounded by four red squares.

Battenberg Guiding Principals


White Fleet



The guiding principals of the Battenberg Response Pattern on the Urban Fleet are:

1. FENZ logo should be positioned clear of the front door window.
2. The Battenberg pattern should extend to the rear of the vehicle and should be two lines deep.
3. The Battenberg pattern should stack three lines deep on the cab.
4. The centre of the Battenberg strip should align with the Battenberg on the front cab.
5. The blue crest square should be surrounded by four red squares.

Urban Fleet

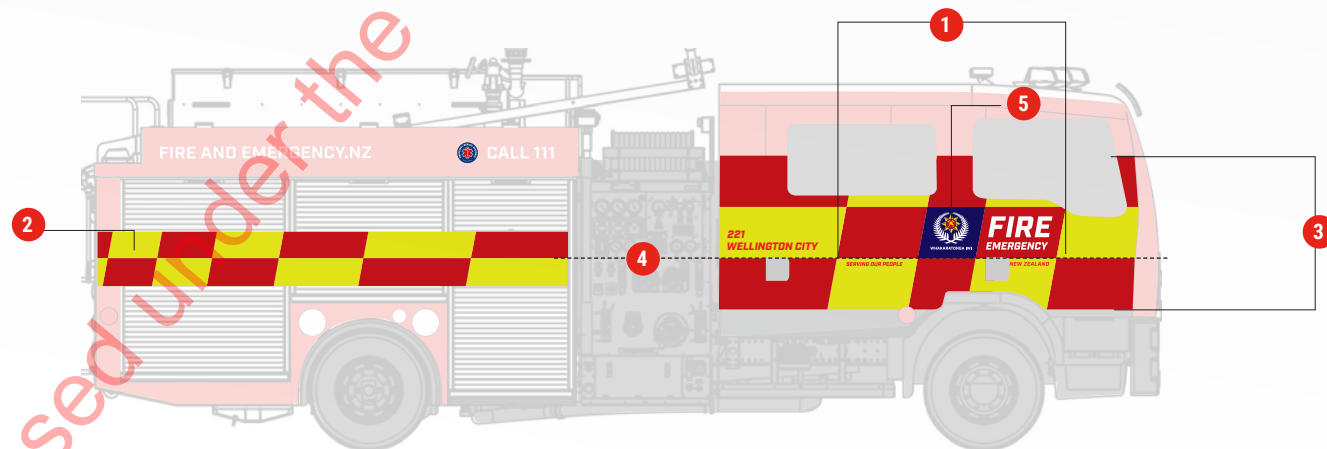

Released under the Official Information Act 1982

When applying the Fire and Emergency New Zealand Brand elements to the emergency fleet it is very important to ensure that the integrity of the graphics are maintained over the various makes and models of vehicles.

Please ensure that the natural bends, breaks, and edges of the vehicle do not compromise the clarity and longevity of the brand graphics.

White fleet - Watch outs



Do not continue the battenberg onto the sill. Avoid small areas of vinyl.



Do not allow the crest to be interrupted by door openings/panel gaps.



Please ensure the red ends of the bonnet decal are symmetrical, angling inwards at 10 degrees.



Do not wrap complex curves.

Released under the Official Information Act 1982


Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlaminate
- V8013 Fluorescent Yellow/Green
- OL2008

Back window white text

- Avery 900 Supercast

WHITE FLEET EXAMPLE - Double Cab Toyota Hilux 2015





Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlaminate
- V8013 Fluorescent Yellow/Green
- OL2008
- Back window white text
- Avery 900 Supercast

WHITE FLEET EXAMPLE - Double Cab Ford Ranger 2015

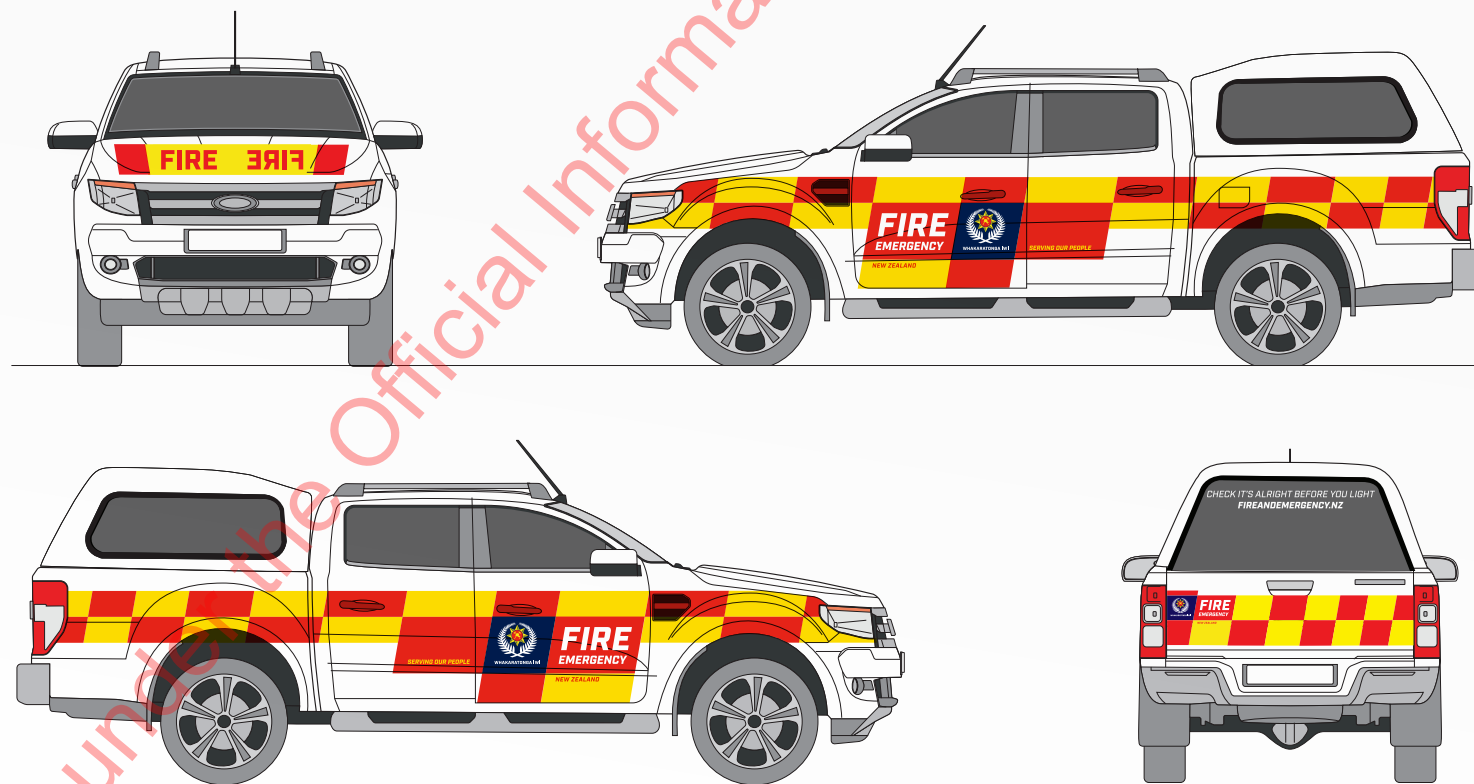

Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals


Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlamine
- V8013 Fluorescent Yellow/Green
- OL2008

Back window white text

- Avery 900 Supercast

RESPONSE VEHICLE EXAMPLE - Van Ford Transit



Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

There are four safety message options to choose from.

Printing Specifications
EVERY PRODUCT

Back window white text

Avery 900 Supercast

RESPONSE VEHICLE EXAMPLE - Safety messages



Released under the Official Information Act 1982

Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlaminate
- V8013 Fluorescent Yellow/Green
- OL2008

NON RESPONSE VEHICLE EXAMPLE - Pool Car



Released under the Official Information Act 1982

Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlamine
- V8013 Fluorescent Yellow/Green
- OL2008

NON RESPONSE VEHICLE EXAMPLE - Ute with Canopy

Released under the Official Information Act 1982

Printing Specifications
AVERY PRODUCT

- White - V8000
- Blue Crest - Digitalprinted by HP latex printer on V8000, laminated in DOL1460 overlaminate
- V8013 Fluorescent Yellow/Green
- OL2008

NON RESPONSE VEHICLE EXAMPLE - Van



Released under the Official Information Act 1982

When applying the Fire and Emergency New Zealand Brand elements to the emergency fleet it is very important to ensure that the integrity of the graphics are maintained over the various makes and models of vehicles.

Please ensure that the natural bends, breaks, and edges of the vehicle do not compromise the clarity and longevity of the brand graphics.

Appliance livery - Watch outs



Do not allow typography to be cropped by door handles and lights.



Do not allow the crest to be interrupted by door openings.



Please ensure the red ends of the bonnet decal are symmetrical, angling inwards at 10 degrees.



Do not apply small pieces of vinyl into areas that break the battenberg pattern.



Please ensure that the Battenberg checked pattern is consistent.

Released under the Official Information Act 1982


Printing Specifications

Typography: TBD

Battenberg: TBD

Logo: TBD

RURAL FLEET EXAMPLE - ISUZU



Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals




Printing Specifications

Typography: TBD

Battenberg: TBD

Logo: TBD

RURAL FLEET EXAMPLE

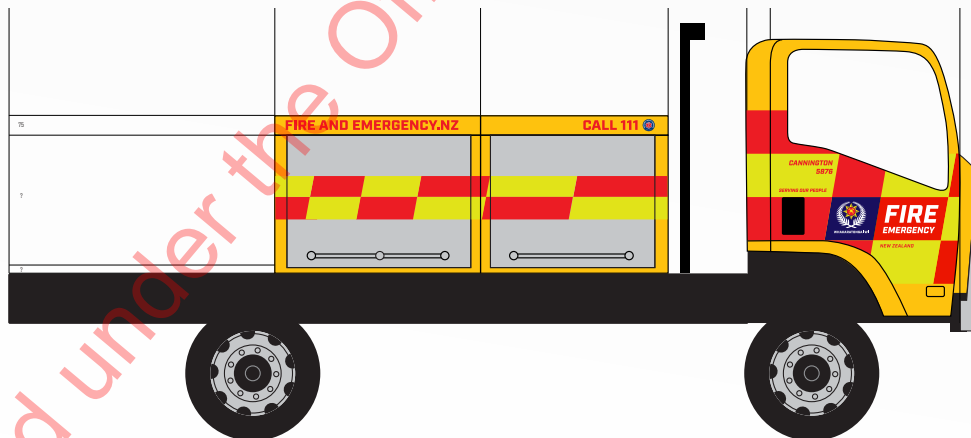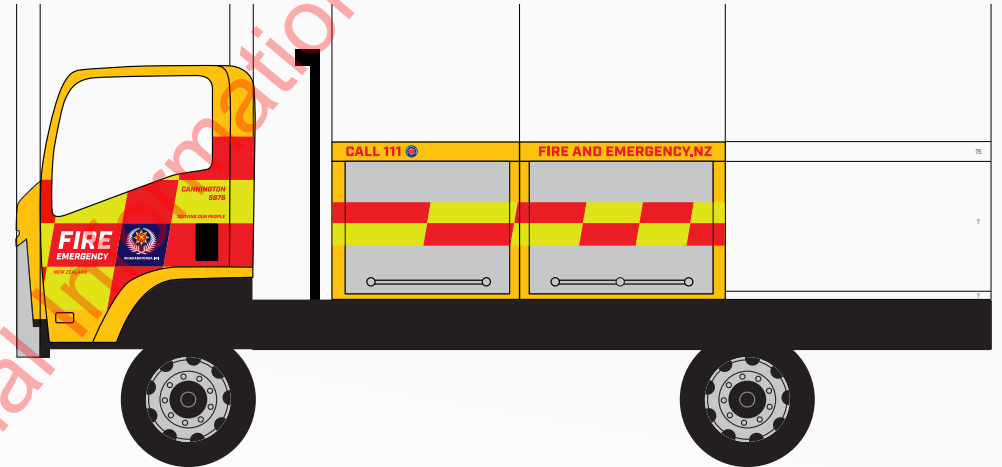

Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Released under the Official Information Act 1982




Printing Specifications

Typography: TBD

Battenberg: TBD

Logo: TBD

RURAL FLEET EXAMPLE - VOLVO 8x4

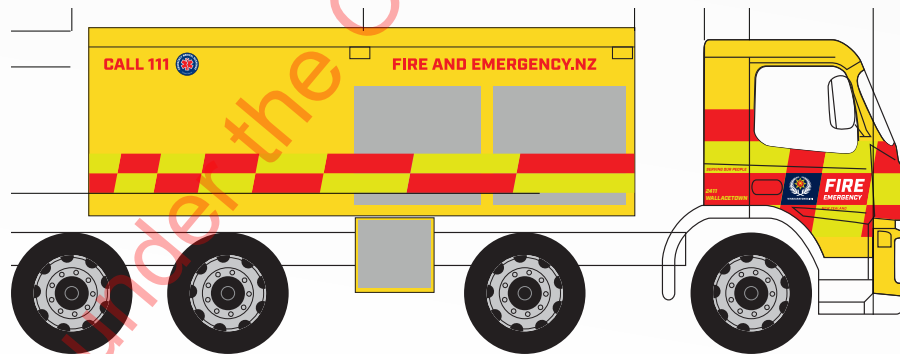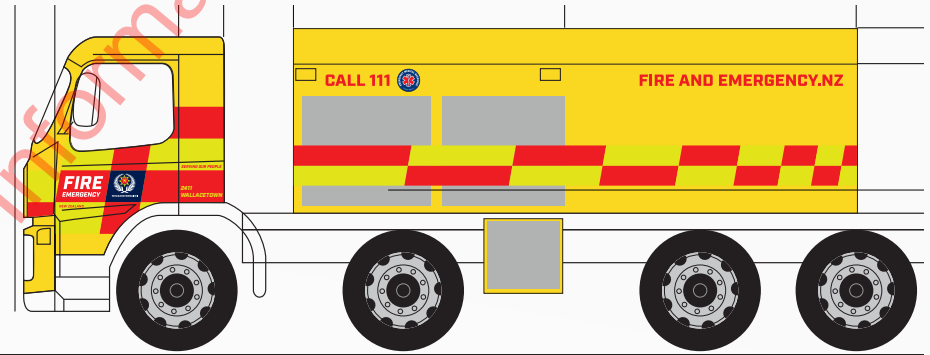

Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Typography:

Product: 3M Diamond Grade

- 3M 680C white reflective
- 3M DG3 Series 4000 Yellow green Diamondgrade

- 3M Red EC 1170 Overlay

Front/back facing Typography:

- 180C 3M tomato Red

Battenberg:

Product: 3M Diamond Grade


- 3M DG3 Series 4000 Yellow green Diamondgrade

- 3M Red EC 1170 Overlay

Logo:

- Printed on reflective white vinyl
- Dark Blue PANTONE 2766 C
- Red PANTONE 485 C
- Yellow PANTONE 3955 C

URBAN FLEET TYPE 2 EXAMPLE - IVECO EUROCAB



Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Typography:

Product: 3M Diamond Grade

- 3M 680C white reflective
- 3M DG3 Series 4000 Yellow green Diamondgrade

3M Red EC 1170 Overlay

Front/back facing Typography:

180C 3M tomato Red

Battenberg:

Product: 3M Diamond Grade



- 3M DG3 Series 4000 Yellow green Diamondgrade

3M Red EC 1170 Overlay

Logo:

- Printed on reflective white vinyl
- Dark Blue PANTONE 2766 C
- Red PANTONE 485 C
- Yellow PANTONE 3955 C

URBAN FLEET TYPE 3 - M.A.N

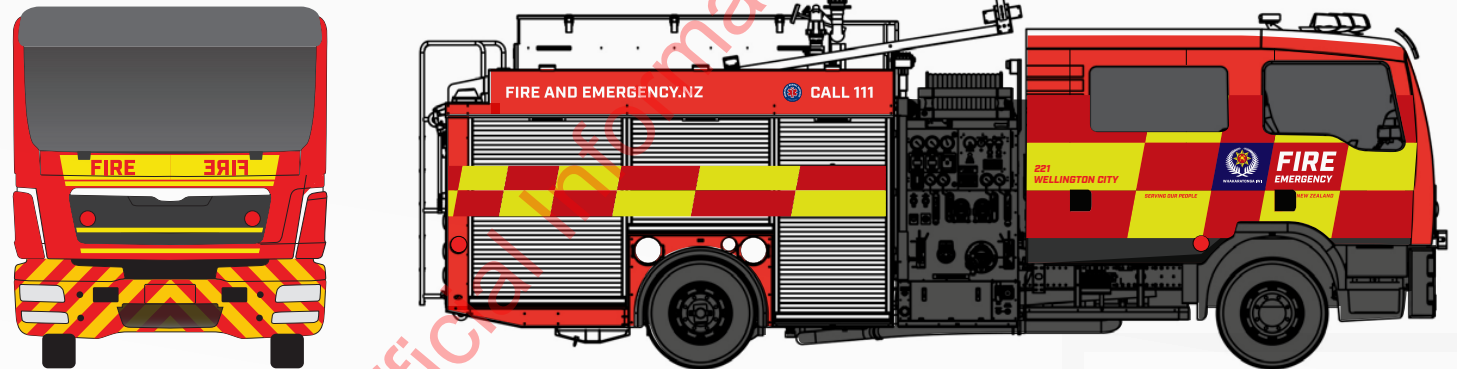

Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Logo:

- Printed on reflective white vinyl
- Dark Blue PANTONE 2766 C
- Red PANTONE 485 C
- Yellow PANTONE 3955 C

Partial rebranding

Horizontal retrofit logo

540mm



540mm



111Emergency ©Daniel Cap

Vertical retrofit logo

262mm



456mm



Released under Official Information Act 1982

Printing Specifications

Typography:

Product: 3M Diamond Grade

- 3M 680C white reflective
- 3M DG3 Series 4000 Yellow green Diamondgrade

- 3M Red EC 1170 Overlay

Front/back facing Typography:

- 180C 3M tomato Red

Battenberg:

Product: 3M Diamond Grade

- 3M DG3 Series 4000 Yellow green Diamondgrade

- 3M Red EC 1170 Overlay

Logo:

- Printed on reflective white vinyl
- Dark Blue PANTONE 2766 C
- Red PANTONE 485 C
- Yellow PANTONE 3955 C

Te Reo Livery Concept




Released under the Official Information Act 1982

**FIRE AND EMERGENCY NEW ZEALAND
BRAND GUIDELINES**

VERSION 3.0 | FEBRUARY 2018

Released under the Official Information Act 1982

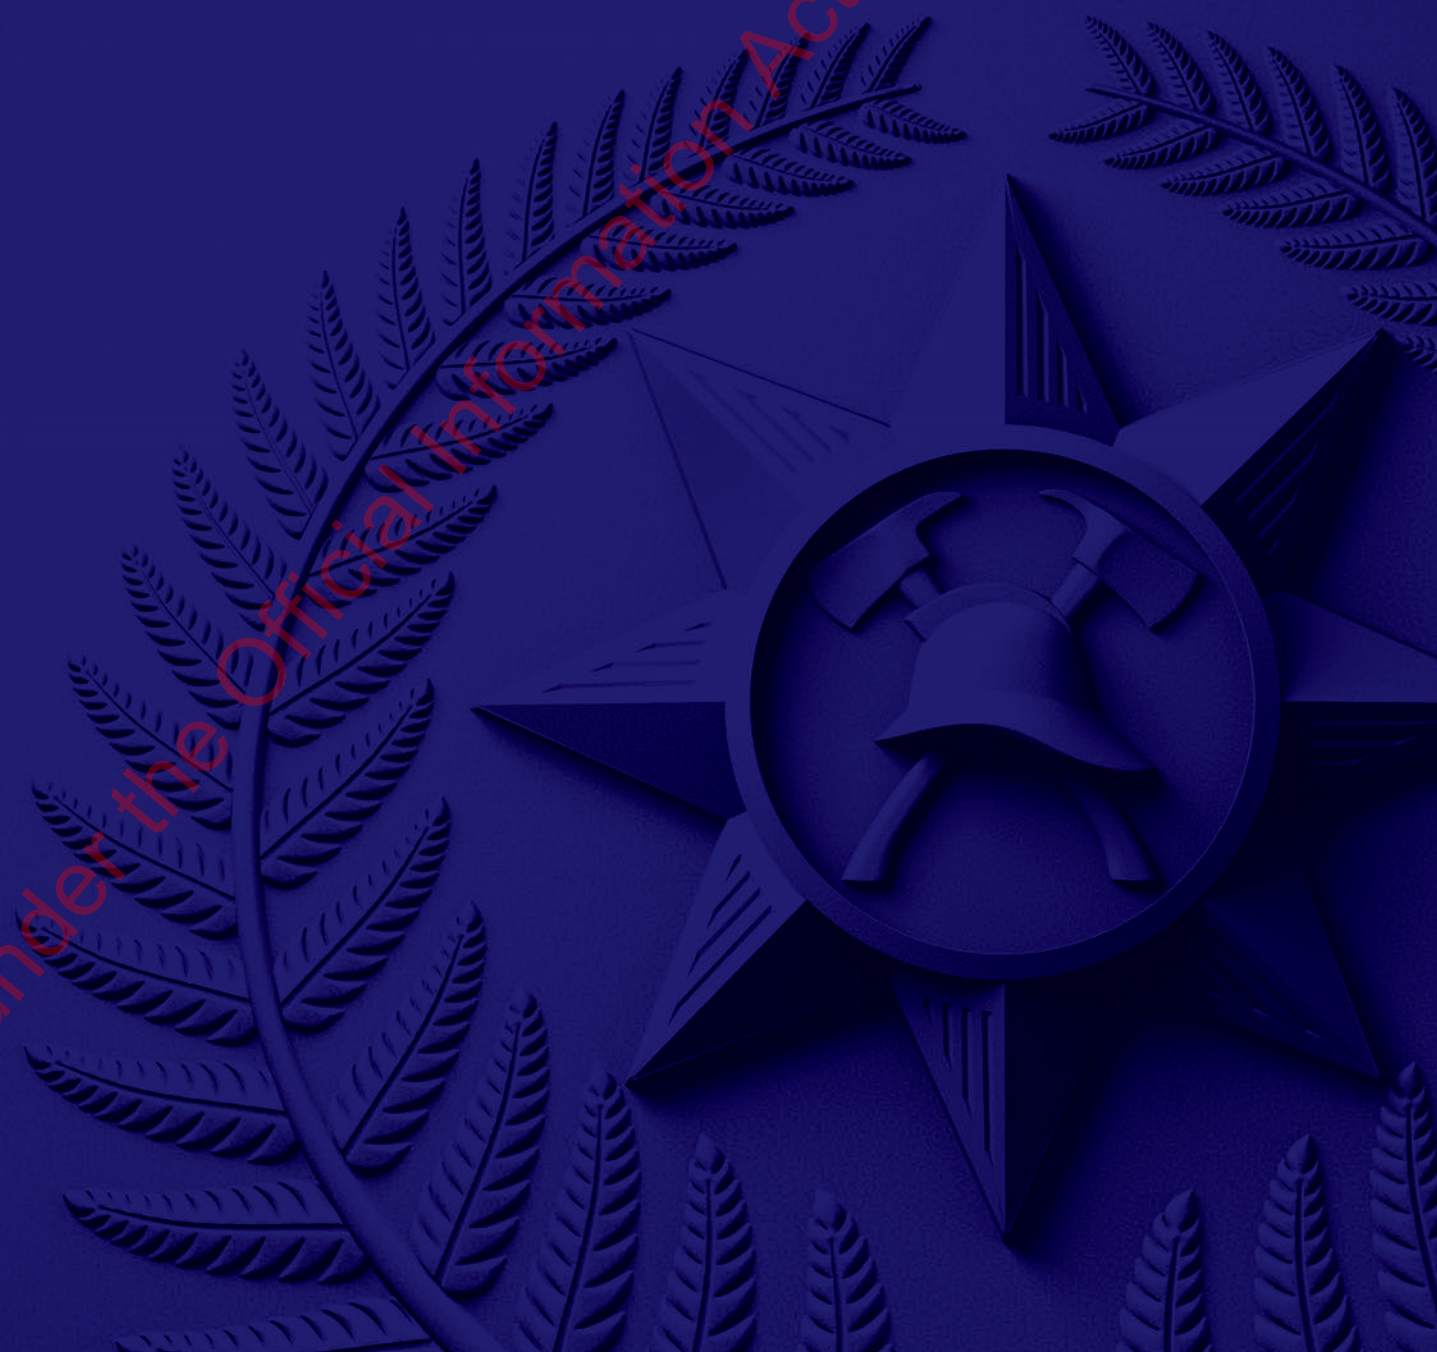



**FLEET
SIGNAGE**

Contents

Purpose of this document	03
Primary colours	04
Battenberg response pattern	05
Battenberg guiding principals	06
White fleet livery – watch outs	07
Response white fleet example	08
Response white fleet example – safety messages	11
Non response vehicle example	12
Appliance livery – watch outs	14
Bi-lingual signage layout and guidelines	15
Rural fleet example	18
Urban fleet example	22
Partial rebranding	26
New Zealand Transport Agency (NZTA)	27
Employer Recognition Programme (ERP)	29
Assessment and Removal of Old Signage	31
Details and Location of New Signage	33

Released under the Official Information Act 1982

Purpose of this document

We have Fleet Signage guidelines to ensure we are consistently and clearly communicating our identity on all of our appliances. This means all New Zealanders know who we are and what we stand for and the communities we serve are more likely to trust us. When there's trust, we can work together more closely and better protect people and properties.

These guidelines are for sign writers, builders and anyone who works with Fire and Emergency New Zealand's appliances. They contain information on colours, response patterns, specific fleet examples, vehicle lighting rules and our Employee Recognition Programme.

These guidelines need to be followed when working with Fire and Emergency New Zealand appliances. In cases where this is impossible due to any irregularity in the appliances, please contact identity@fireandemergency.nz to discuss alternative options.

Whakarātonga Iwi.

Serving our people.

Released under the Official Information Act 1982

Primary colours



PMS 3955c, colour mode Lab



PMS 185c, colour mode Lab



PMS 2766c, colour mode Lab

Released under the Official Information Act 1982

The Fire and Emergency New Zealand Response Fleet uses a distinctive Battenberg pattern for optimum visibility.

The red and yellow 'Battenberg' is internationally recognised as symbolising fire, as well as the coming together of urban (red) and rural (yellow) fire services.

The dynamic composition of the Battenberg reflects Fire and Emergency New Zealand's speed and responsive nature.

The modular nature of the Battenberg strip allows the logo to be integrated seamlessly for greater visibility.

A variation of the logo has been created especially for fleet livery, to ensure the word 'FIRE EMERGENCY' reinforces the forward direction of the vehicle.

Battenberg response pattern



RIGHT SIDE - 'FIRE EMERGENCY' should always point to the front of the vehicle



LEFT SIDE - 'FIRE EMERGENCY' should always point to the front of the vehicle



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Released under the Official Information Act 1982

The guiding principles of the Battenberg Response Pattern on the White Response Fleet are:

1. FENZ logo should be positioned on the front door.
2. The Battenberg pattern should extend to the front and rear of the vehicle and should be two lines deep.
3. The Battenberg pattern should stack three lines deep on the door.
4. The blue crest square should be surrounded by four red squares.

Battenberg guiding principles


White Response Fleet



The guiding principles of the Battenberg Response Pattern on the Urban Fleet are:

1. FENZ logo should be positioned clear of the front door window.
2. The Battenberg pattern should extend to the rear of the vehicle and should be two lines deep.
3. The Battenberg pattern should stack three lines deep on the cab.
4. The centre of the Battenberg strip should align with the Battenberg on the front cab.
5. The blue crest square should be surrounded by four red squares.

Appliance Fleet

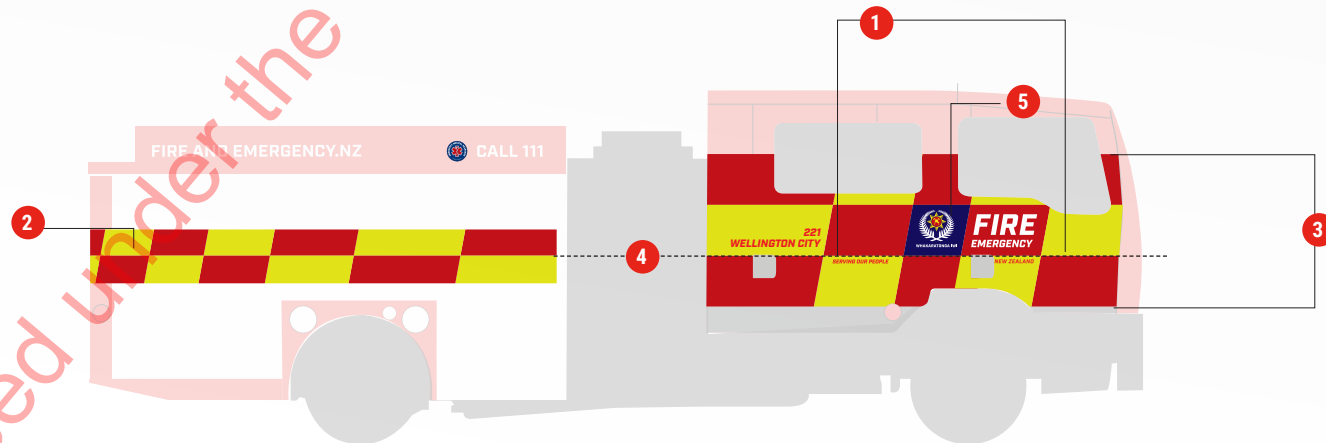

When applying the Fire and Emergency New Zealand Brand elements to the emergency fleet it is very important to ensure that the integrity of the graphics are maintained over the various makes and models of vehicles.

Please ensure that the natural bends, breaks, and edges of the vehicle do not compromise the clarity and longevity of the brand graphics.

White fleet livery – watch outs



Do not continue the battenberg onto the sill.
Avoid small areas of vinyl.



Do not allow the crest to be interrupted by door openings/panel gaps.



Please ensure the red ends of the bonnet decal are symmetrical, angling inwards at 10 degrees.



Do not wrap complex curves.

Released under the Official Information Act 1982

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlaminates.

Colours

- PMS 3955c, colour mode Lab
- PMS 185c, colour mode Lab
- PMS 2766c, colour mode Lab

Back Window text

Avery 900 Supercast White


Typography

- Industry Medium Italic for safety message.
- Industry Black Italic for website
- 133pt/33mm high, but this is able to be adjusted if the available canopy window space is smaller than standard.

Bonnet Red – non reflective to comply with NZTA rules no red reflective facing forward

Avery 987 Supercast Spicy Red

Response white fleet example – Double Cab Toyota Hilux 2015



Notes:

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlaminates.

Colours

- PMS 3955c, colour mode Lab
- PMS 185c, colour mode Lab
- PMS 2766c, colour mode Lab

Back Window text

Avery 900 Supercast White



Typography

- Industry Medium Italic for safety message.
- Industry Black Italic for website
- 133pt/33mm high, but this is able to be adjusted if the available canopy window space is smaller than standard.

Bonnet Red – non reflective to comply with NZTA rules no red reflective facing forward

Avery 987 Supercast Spicy Red

Response white fleet example – Double Cab Ford Ranger 2015

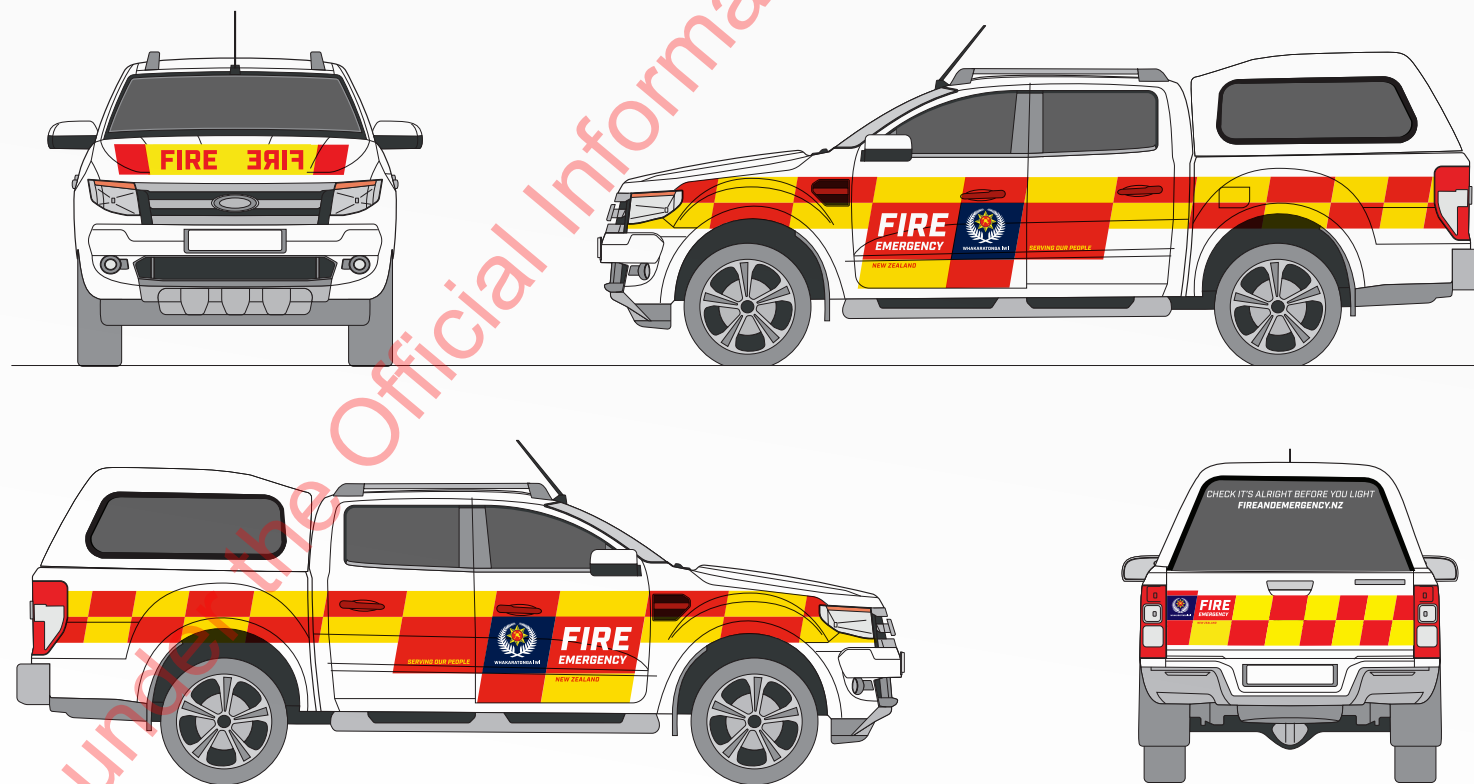

Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals.

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlamine.

Colours

■ PMS 3955c, colour mode Lab

■ PMS 185c, colour mode Lab

■ PMS 2766c, colour mode Lab

Back Window text

Avery 900 Supercast White


Typography

- Industry Medium Italic for safety message.
- Industry Black Italic for website
- 133pt/33mm high, but this is able to be adjusted if the available canopy window space is smaller than standard.

Bonnet Red – non reflective to comply with NZTA rules no red reflective facing forward

Avery 987 Supercast Spicy Red

Response white fleet example – Van Ford Transit



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlaminates.

Colours

■ PMS 3955c, colour mode Lab

■ PMS 185c, colour mode Lab

■ PMS 2766c, colour mode Lab

Back Window text

Avery 900 Supercast White

Typography

- Industry Medium Italic for safety message.
- Industry Black Italic for website
- 133pt/33mm high, but this is able to be adjusted if the available canopy window space is smaller than standard.

Bonnet Red – non reflective to comply with NZTA rules no red reflective facing forward

Avery 987 Supercast Spicy Red

Response white fleet example – Safety messages



Released under the Official Information Act 1982

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlamine.

Colours

- PMS 3955c, colour mode Lab
- PMS 185c, colour mode Lab
- PMS 2766c, colour mode Lab

Non response vehicle / pool car example



Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlamine.

Colours

- PMS 3955c, colour mode Lab
- PMS 185c, colour mode Lab
- PMS 2766c, colour mode Lab

Non response vehicle example - Ute with canopy



When applying the Fire and Emergency New Zealand Brand elements to the emergency fleet it is very important to ensure that the integrity of the graphics are maintained over the various makes and models of vehicles.

Please ensure that the natural bends, breaks, and edges of the vehicle do not compromise the clarity and longevity of the brand graphics.

Appliance livery – Watch outs



Do not allow typography to be cropped by door handles and lights.



Do not allow the crest to be interrupted by door openings.



Please ensure the red ends of the bonnet decal are symmetrical, angling inwards at 10 degrees.



Do not apply small pieces of vinyl into areas that break the Battenberg pattern.



Please ensure that the Battenberg checked pattern is consistent.

Released under the Official Information Act 1982

Poutama design guidelines

- There will be 3 bands, the 3 bands make up the Poutama.
- The width of the bands are not a set width and can be altered to best suit the vehicle they are being applied to. However all the bands on the vehicle must be the same width. Nominally the width of the band is 40mm.
- The gap between the bands is not a set width, this gap can be altered to best suit the vehicle design. However the gap between the bands must be the same.
- The bands are to be applied in a way so the lines are straight, the bands start at the front of the vehicle down low and work their way to a 'peak' on the corner of the vehicle and then taper down the side.
- Material spec: 3m 2080-G10-gloss white. Note: the Avery product equivalent can be used.

Bi-lingual signage layout and guidelines



Released under the Official Information Act 1982

Front grill

- The word 'AHI' to be applied to the centre of the grill.
- The font and text height to be the same as the FIRE, ERIF.
- Tomato red colour code is 3M Scotchal 180mc -13 Tomato Red. (New bullet point) 3M Scotchal 180mc – 15 Bright Yellow background can be used as an alternative if the shapes/curves are outside of the diamond grade application guidelines.



Note

The Avery products as described previous can also be used.

Rear of appliance

- The word 'AHI' to be applied above 'FIRE EMERGENCY'
- The font and text height to be the same as the FIRE.
- Material to be a red overlay on yellow reflective.
- Product: 3M Diamond Grade, 3M DG3 Series 4000 Yellow Green Diamondgrade. 3M Red EC 1170 Overlay.

Note

The Avery products as described previous can also be used.



Station name

- The call sign number to always be at the top.
- Text is justified towards the crest.
- The text to be on a 10° slope matching the Battenberg.
- If 3 lines of text, the top row of text is aligned with 'FIRE', the bottom row of text is aligned with Whakaratonga Iwi, the centre row of text is evenly spaced between top and bottom.
- If 2 rows of text, the bottom row of text is aligned with Whakaratonga Iwi, the top row of text is above with standard spacing.

Material spec

Oracal Overlay VC612.

Note

The Avery product equivalent can be used instead of the Oracal product.



Released under the Official Information Act 1982

Printing Specifications

Avery

V8000 White Visiflex, digitally printed by HP 360 latex printer, using 3M match print profile, and colour management Magenta +15, Yellow +5.

Laminated with DOL1060z overlamine.

Colours

■ PMS 3955c, colour mode Lab

■ PMS 185c, colour mode Lab

■ PMS 2766c, colour mode Lab

Bonnet Red – non reflective to comply with NZTA rules no red reflective facing forward.

Avery 987 Supercast Spicy Red

Non reflective panels

- To comply with NZTA lighting rules.


MPI 1105, digitally printed by HP 360 latex printer, laminated with DOL6460 overlamine.

Colours

■ PMS 396c, converted to CMYK (C: 16.89, M: 1.3, Y: 100, K: 0)

■ PMS 200c, converted to CMYK (C: 16.5, M: 100, Y: 86.51, K: 6.86)


Rural fleet example - ISUZU



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Rural fleet example - ISUZU



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Printing Specifications

Typography

3M Scotchal 180mc -13
Tomato Red.

Battenberg

Product: 3M Diamond Grade.
3M DG3 Series 4000 Yellow
Green Diamond grade.
3M Red EC 1170 Overlay.

Logo


Printed on reflective
white vinyl

Dark Blue PANTONE 2766 C

Red PANTONE 485 C

Yellow PANTONE 3955 C

Rural fleet example - Hino



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Rural fleet example - Hino



Released under the Official Information Act 1982

Printing Specifications

Typography

3M 680C white reflective

Front/back facing Typography

3M Scotchal 180mc -13
Tomato Red.

Battenberg

Product: 3M Diamond Grade.
3M DG3 Series 4000 Yellow
Green Diamond grade.
3M Red EC 1170 Overlay.

Logo


Printed on reflective
white vinyl

Dark Blue PANTONE 2766 C

Red PANTONE 485 C

Yellow PANTONE 3955 C

Urban fleet example – TYPE 2 IVECO EURO CAB



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Urban fleet example – TYPE 2 IVECO EURO CAB



Released under the Official Information Act 1982

Printing Specifications

Typography

3M 680C white reflective

Front/back facing Typography

3M Scotchal 180mc -13
Tomato Red.

Battenberg

Product: 3M Diamond Grade.
3M DG3 Series 4000 Yellow
Green Diamond grade.
3M Red EC 1170 Overlay.

Logo


Printed on reflective
white vinyl

 Dark Blue PANTONE 2766 C

 Red PANTONE 485 C

 Yellow PANTONE 3955 C

Urban fleet example – TYPE 3 M.A.N



Notes

The angle of the Battenberg is 10 degrees (10°). Please ensure this angle is maintained across all decals

Urban fleet example – TYPE 3 M.A.N.



Released under the Official Information Act 1982

Printing Specifications

Logo

Printed on 3M white vinyl IJ180 MC

Dark Blue PANTONE 2766 C

Red PANTONE 485 C

Yellow PANTONE 3955 C

Gloss Laminate 8518

Note

Where practical the larger logo should be used, check both sides of vehicle before applying so the logo can be fitted in the same location each side. Use the smaller logo when the larger will not fit.

Partial rebranding

Horizontal retrofit logo



540mm



400mm



Vertical retrofit logo



262mm



183mm



Released under the Information Act 1982

Retroreflective material fitted within 150mm of a required lamp or retroreflector on a heavy motor vehicle must:

- comply with an approved vehicle standard for retroreflective material in this rule.

Approved vehicle standards for retroreflective material are:

- UN/ECE Regulation No. 104, Uniform provisions concerning the approval of retro-reflective markings for heavy and long vehicles and their trailers (E/ECE324 – E/ECE/TRANS/505/Rev.2/ Add.103) or
- have a non-reflective overlay applied to achieve a 150mm distance of non-reflective from a required lamp.

Retroreflective material must not be fitted to a vehicle in a way that may cause other drivers and other road users to be confused about the orientation of the vehicle.

New Zealand Transport Agency (NZTA) Vehicle Lighting Rule Relating to Retroreflective Material



Daytime photo showing the non-reflective around the require lamp

SIDE IMAGE TO COME

Released under the Official Information Act 1982

Printing/product specifications

3M Scotchal 180mc-15 Bright Yellow

3M Scotchal 180mc -13 Tomato Red

Avery – printed on MPI1105 Avery laminated DOL6460 PMS to match reflective

Avery 900 silver metallic

Note

For further information please refer to the NZTA vehicle lighting rule.



Night time photo showing the non-reflective around the require lamp

SIDE IMAGE TO COME

Released under the Official Information Act 1982

Our Employer Recognition Programme (ERP) recognises businesses that employ and support people (including those of our self-employed volunteers) who volunteer at their local fire brigade. The programme is based on building partnerships with employers and self-employed volunteers who share our values and commitment to building strong, safe and caring communities.

The ERP decal is to be fitted to the front locker (A Locker) of the appliance body.

Note

For further information please refer to the ERP Coordinator at Fire and Emergency National Headquarters.

Employer Recognition Programme (ERP)



Released under the Official Information Act 1982

Signage Guideline for Cascading/Transferring Appliances

As well as all new appliances we are required to put bilingual signage on cascading appliances as approved by the Fire and Emergency New Zealand Board:

“Whenever an existing appliance is cascaded (transferred), we will undertake a partial bilingual branding by including the word ‘ahi’ and the Te Reo Māori translation of the station name as an interim measure.”

i.e. no Poutama but the rest the same as a new appliance

These guidelines are required to be followed for consistency across the fleet. For further assistance, please contact National Manager, Fleet Programmes and Standards.

The first stage is to walk around the appliance and identify any non-approved signage, this non-approved signage needs to be removed as well as the old station name, call sign number and 'FIRE' & 'ERIF' from the grill. (see these photos for examples).

Assessment and Removal of Old Signage



Remove station name and call sign number circled in blue.



Remove station name and call sign number circled in blue.

Release by the Official Information Act 1982



Remove non-approved call sign number on grill, remove call sign number on 'B' pillar, remove old station name circled in blue. Remove 'FIRE' & 'ERIF' off the grill.



Remove non-approved signage on sun visor circled in blue. Remove 'FIRE' & 'ERIF' off the grill.



Remove non-approved call sign number on rear of appliance.

Details and Location of New Signage



Front Grill

- The words 'FIRE' 'AHI' and 'ERIF' applied as per this photo.
- The font is to be Industry.
- The material is to be non-reflective 3M Scotchal 180mc-13 Tomato Red or the Avery equivalent.
- The size of the font should be as large as practical, all 3 words will be the same size lettering.
- AHI is to be applied in the centre of the grill. FIRE to be applied on the right hand (Drivers) side and ERIF applied on the left hand (Passengers) side.
- There will be adequate spacing between the words so they don't all blend together.



Rear of Appliance

If there is **NO** locker door skip this step.

If there is a rear locker door then the word AHI will be fitted as per the above photo. The material used will be the same as what is applied to the rest of the appliance. i.e. if the appliance is in 3M Diamond-grade then the rear signage should be Diamond-grade. If the appliance is in Avery then the rear signage should be in Avery.

- The word AHI to be applied above 'FIRE EMERGENCY'
- The font (Industry) and text height to be the same as 'FIRE'
- Material to be a red overlay on yellow reflective.
- Product: 3M Diamond Grade, 3M DG3 Series 4000 Yellow Green Diamond-grade. 3M Red EC 1170 Overlay.
- The Avery equivalent to be used when the rest of the appliance is in Avery.

Station Name

- The call sign number to always be at the top.
- Text is justified towards the crest (front of the vehicle).
- The text is to align with the front edge of the rear door window.
- When 3 lines of text, the spacing should be even as shown in the photo (New photo required that shows this).
- When 2 lines of text the spacing should be the same as the 3-line text with only bottom and middle line used.
- The bottom row of text will start 40mm above the pressing in the door (Iveco's).
- The text height to be 50mm high.
- The gap between each row of text to be 40mm.
- Yellow reflective text on the red painted background.
- The Te Reo name will include macrons as specified.

Material Spec

- Oracal Overlay VC612
- Avery equivalent (to above Oracal)

**281
NATIONAL PARK
WAIMARINO**

Text example (left hand side)

**281
NATIONAL PARK
WAIMARINO**

Text example (right hand side)

IMAGE TO COME

DRAFT

Released under the Official Information Act 1982

Released under the Official Information Act 1982

